



FILTOMAT
M100/ MG

Self-cleaning
screen filter



MAST FILTR



Anywhere



Any Water Source

**Farming is
our heritage.**
**Filtration is our
legacy.**

At Amiad, our roots are in the land. As farmers, we learned at firsthand what our crops need to thrive. We understand that every water source is different, and how water quality can greatly affect crop yield.

The filter is the first vital link in the irrigation chain. It's there to protect irrigation systems from damage, while delivering the best quality water.

We develop filters that are able to cope with any water quality, in any geographical location.


ERS OF ATION



Any Crop



Any Technology

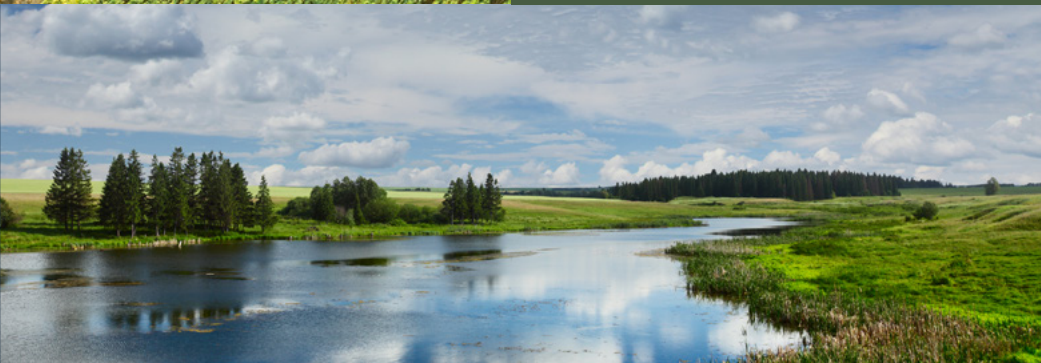

We've spent years mastering filtration technology so we can offer a wide range of filters for every farmer's needs including screen, disc or media technology. Our fully automated filtration systems save time, manpower and costs.



Disc
Technology



Screen
Technology




Media
Technology

We consider every challenge as an opportunity to work side by side with our customers to solve their problems. We'll go anywhere to ensure our filters perform as expected, 24/7, every day of the year.

When you want a high performance filter for your irrigation system, consult with Amiad. We focus on doing what we do best.

Amiad. Masters of Filtration.

The Filtration Process

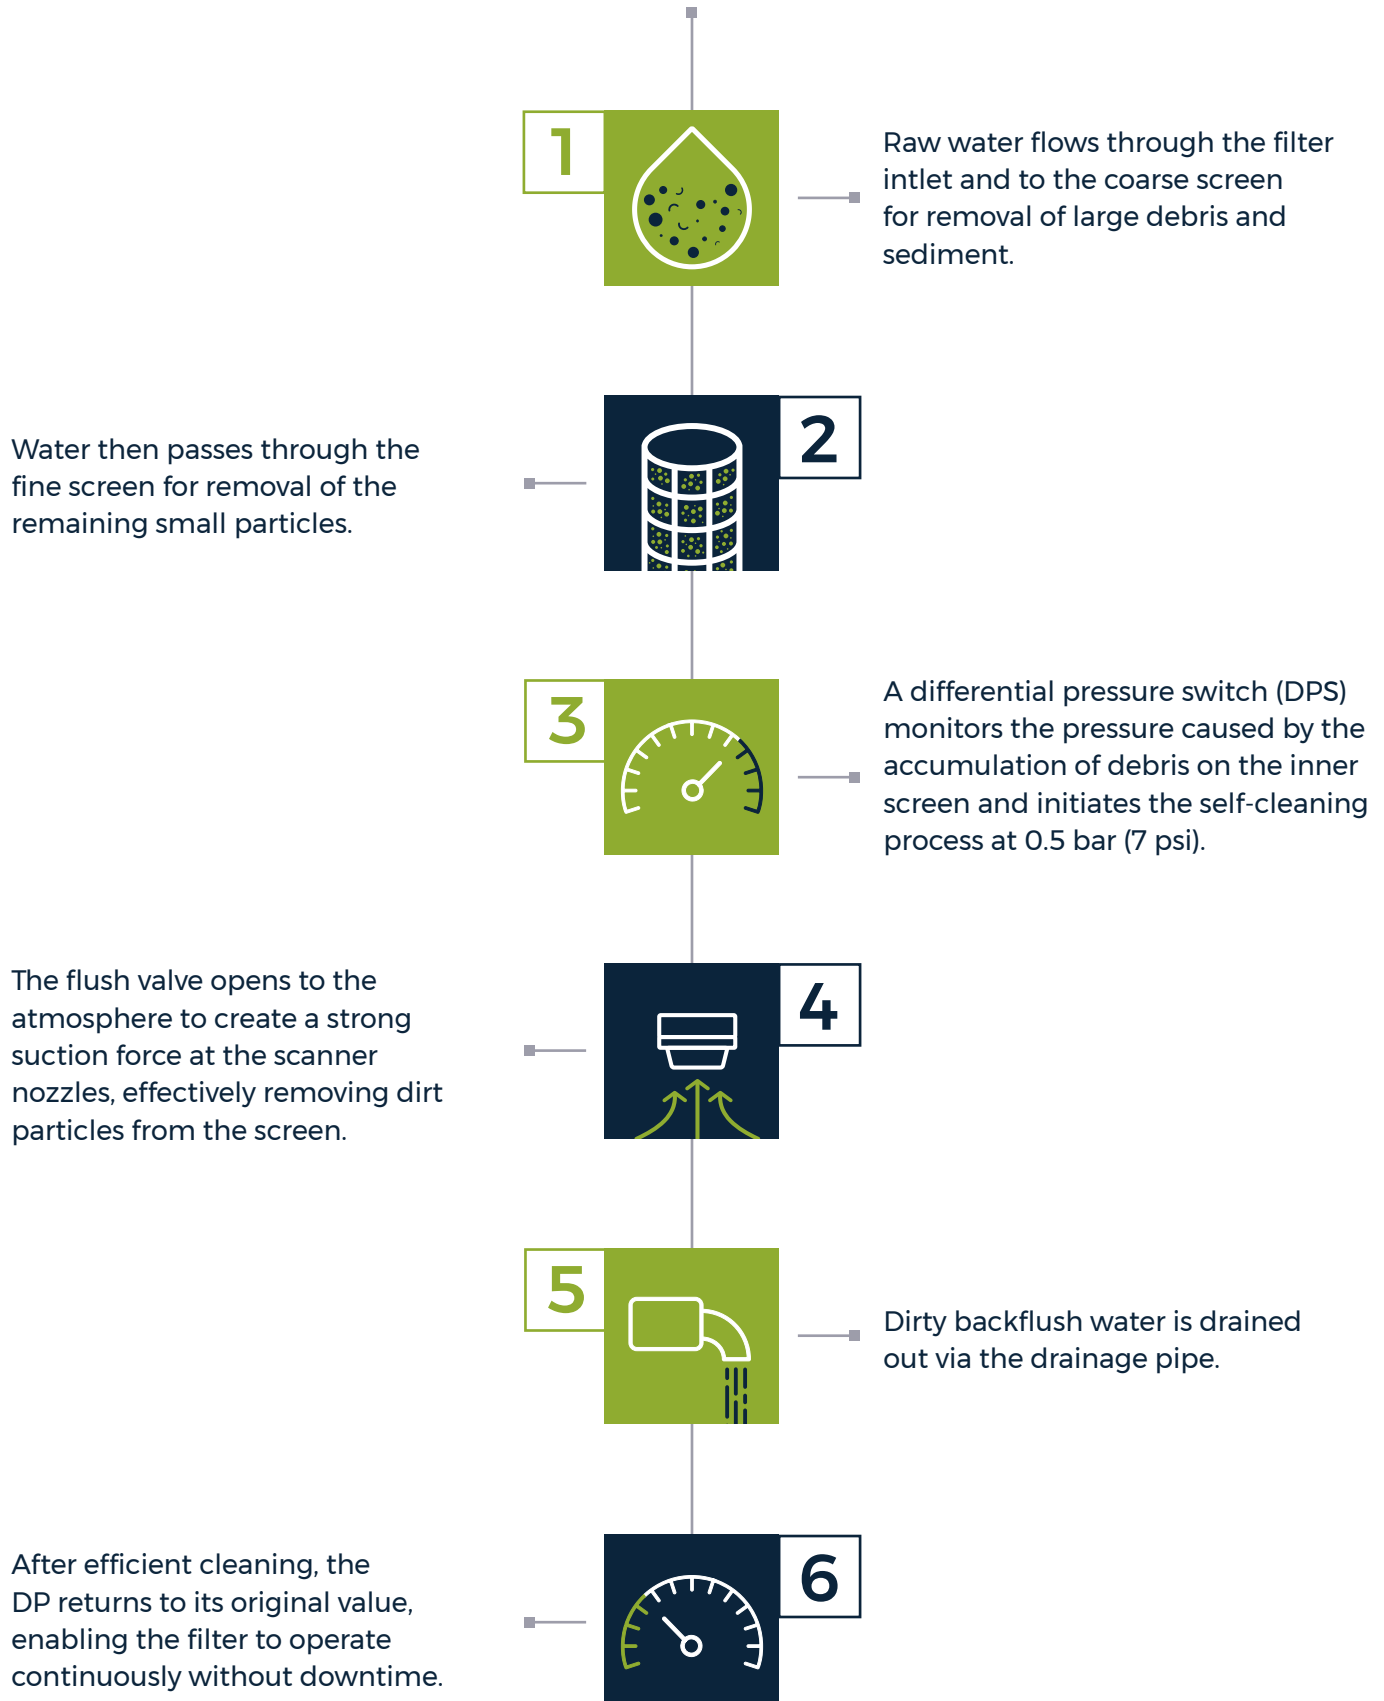



FILTOMAT FEATURES



Simple
construction




Reliable and
durable



Easy maintenance -
disassembles in only
5 parts



Automatic flushing
according to pressure
differential or set time

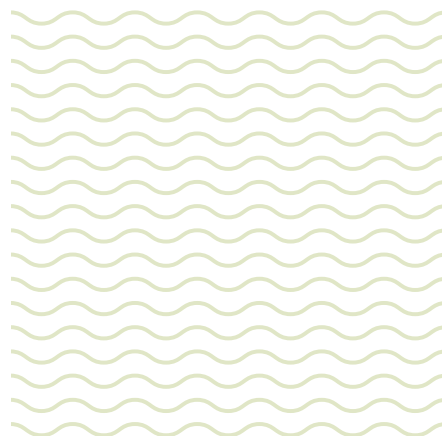


Specifically designed
for agricultural
filtration needs



No interruption
of downstream flow
during flushing

FILTOMAT: An Inside Look

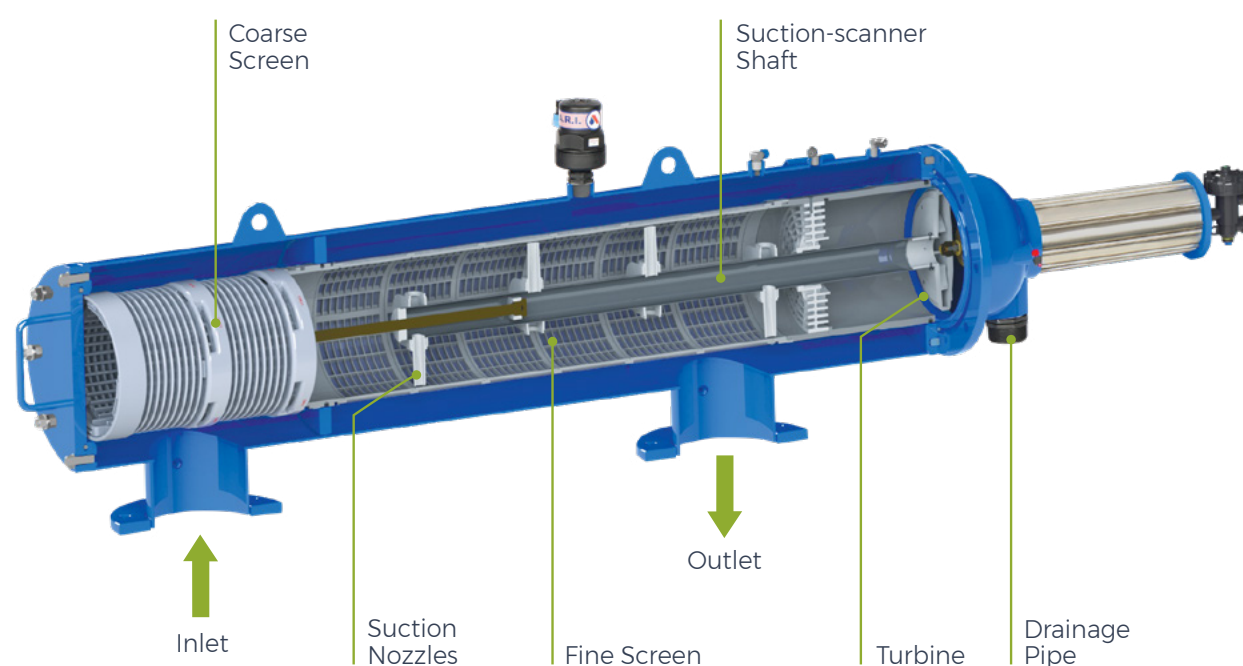

Filtomat M100 Models

Available as a stand alone or as filter bank assembly, with a single ADI-P electronic control system.

M102C/M103C: $\leq 40 \text{ m}^3/\text{h}$ (176 gpm)


M103CL/M104C: $\leq 80 \text{ m}^3/\text{h}$ (350 gpm)

M104CL: $\leq 100 \text{ m}^3/\text{h}$ (440 gpm)

M104LPN/M106LP: $\leq 180 \text{ m}^3/\text{h}$ (793 gpm)

M104XLP/M106XLP/M108LP/M110P: $\leq 400 \text{ m}^3/\text{h}$ (1,760 gpm)



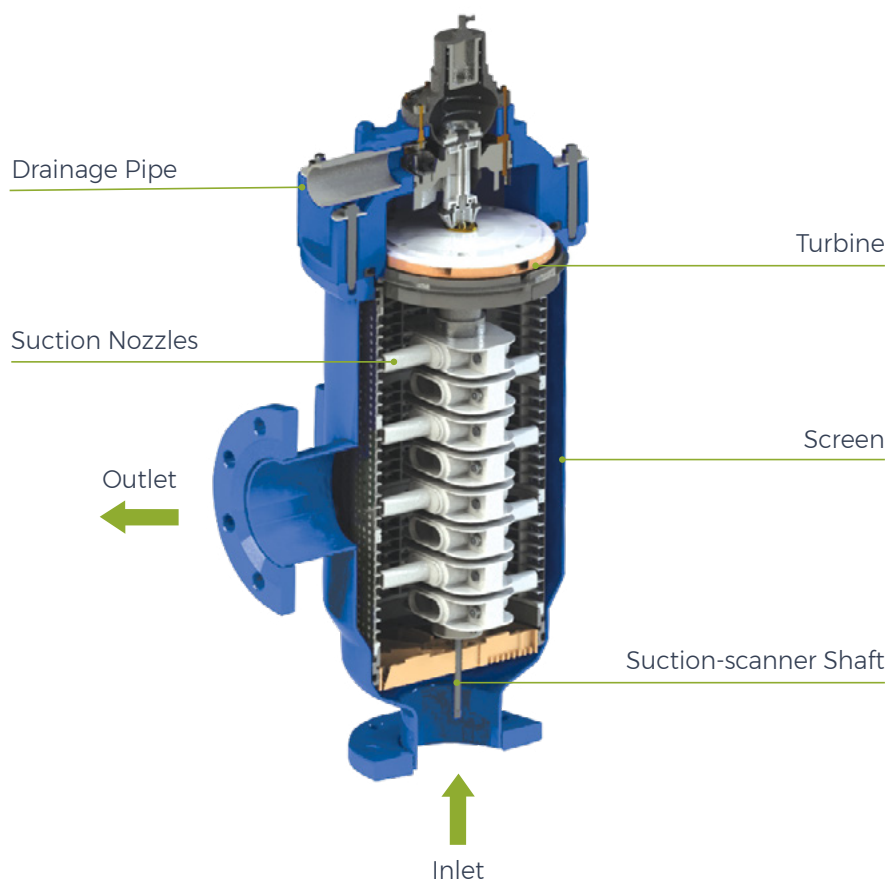

Filtomat MG Models

Modular configuration, available as a stand alone or as filter bank assembly, with a single ADI-P electronic control system.

Delivered fully assembled and requiring a single connection to the inlet, outlet and drain.

MG110 (2 x 108LP): $\leq 400 \text{ m}^3/\text{h}$ (1,760 gpm)

MG112 (3 x 108LP): $\leq 600 \text{ m}^3/\text{h}$ (2,640 gpm)

MG114 (4 x 108LP): $\leq 800 \text{ m}^3/\text{h}$ (3,520 gpm)



The ADI-P Controller

The ADI-P Controller operates the automated processes that flush your Filtomat filters, allowing you to control and monitor them easily and conveniently.



Suitable for low pressure (1.5-10 bar)



Single or dual solenoid configuration



Provides detailed filtration performance data




Bluetooth® range communication



Offline information storage available

ADI-P: the control is in your hands




The ADI-P App

Access your site's filtration performance data directly from the ADI-P app.

Here are some of the data that you can access via the ADI-P app:

- Flush logs
- Flush frequency
- Current DP
- Current outlet and inlet pressure
- Flush quality - measuring DP on the filter before and after flush cycle
- Malfunctions with descriptions of each event
- Battery status and low battery alerts


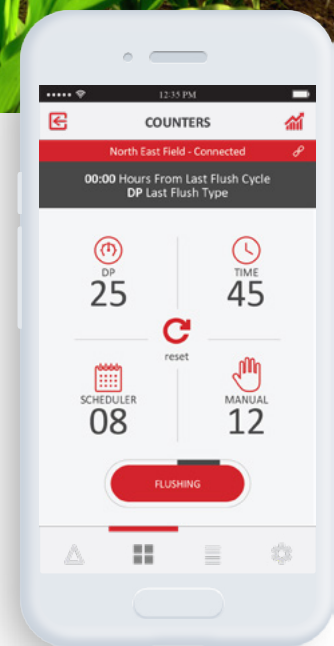


M100 Models



M102C / M103C

Typical Dimensional Drawing



Head Loss Graph (in clean water)
Dim: mm (inch)

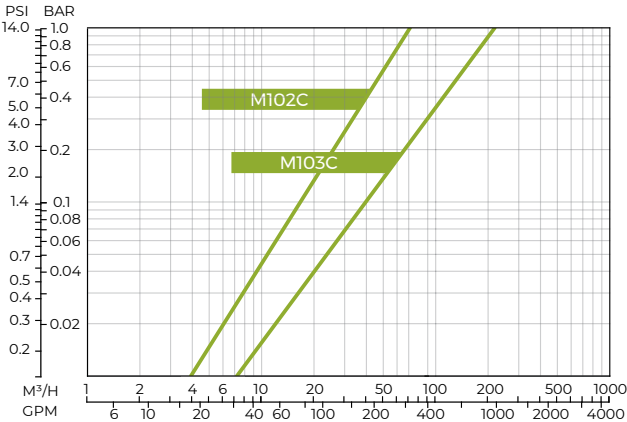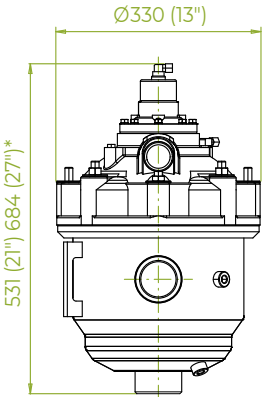

M103CL / M104C

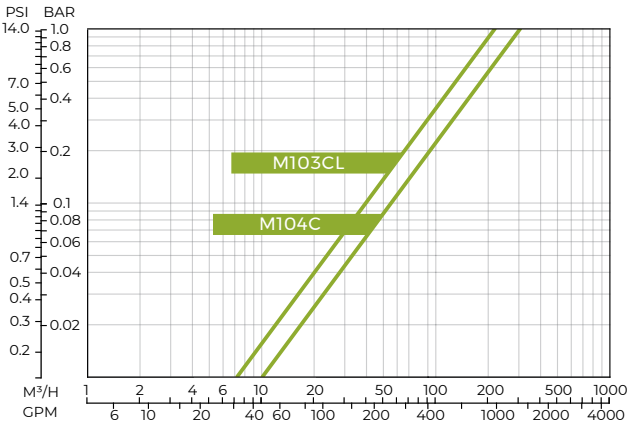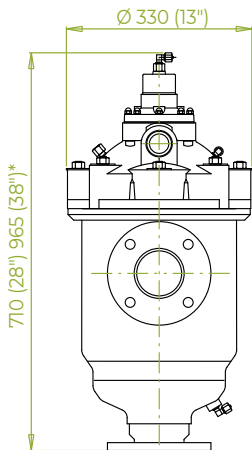

M104CL

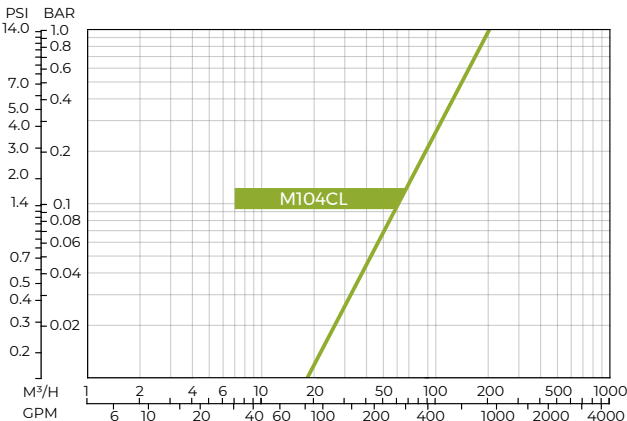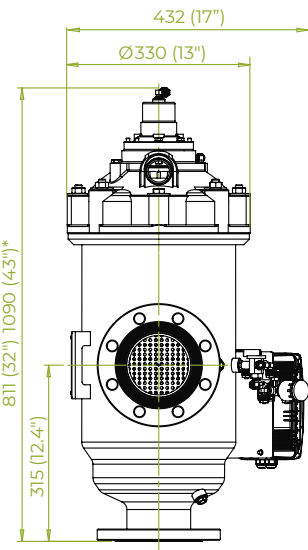

*Approx. length required for maintenance



Technical Specifications - M100 Models

Filter Model	M102C / M103C	M103CL / M104C	M104CL
General Data			
Maximum flow rate*	40 m ³ /h (175 gpm)	80 m ³ /h (350 gpm)	100 m ³ /h (440 gpm)
Inlet/Outlet diameter	2" (50 mm) 3" (80 mm)	3" (80 mm) 4" (100 mm)	4" 100 (mm)
Standard filtration degrees	500, 300, 200, 130, 100, 80 micron		
Minimum working pressure	2 bar (30 psi) For lower pressure please consult Amiad		
Maximum working pressure	8 bar (116 psi)		
Maximum working temperature	55°C (131°F)		
Weight [empty]	2" 22 kg (48.5 lb) 3" 25 kg (55 lb)	3" 30 kg (66 lb) 4" 35 kg (77 lb)	4" 50 kg (110 lb)

* Consult Amiad for optimum flow depending on filtration degree and water quality.

Flushing Data			
Minimum flow for flushing (at 2 bar - 30 psi)	15 m ³ /h (66 gpm)	20 m ³ /h (88 gpm)	22 m ³ /h (97 gpm)
Reject water volume per flush cycle (at 2 bar - 30 psi)	15 liter (4 gallon)	20 liter (5.2 gallon)	28 liter (7.3 gallon)
Flushing cycle time	10 seconds		
Exhaust valve	1.5" (40 mm)		
Flushing criteria	Differential pressure of 0.5 bar (7 psi), time intervals or manual operation		

Screen Data			
Total filtration area	1,300 cm ² (202 in ²)	2,120 cm ² (329 in ²)	3,000 cm ² (465 in ²)
Net filtration area	750 cm ² (116 in ²)	1,500 cm ² (232 in ²)	2,250 cm ² (349 in ²)
Screen types	Molded weavewire stainless steel 316L		


Construction Materials	
Filter housing	Epoxy-coated carbon steel 37-2 (stainless steel 316L on request)
Filter lid	High density polypropylene, epoxy coated carbon steel 37-2 (stainless steel 316L on request)
Cleaning mechanism	PVC and stainless steel 316L
Exhaust valve	Brass, stainless steel 316L, BUNA-N
Seals	BUNA-N
Control	Brass, stainless steel 316L, and acetal

M100 Models


M104LPN / M106LP





Typical Dimensional Drawing

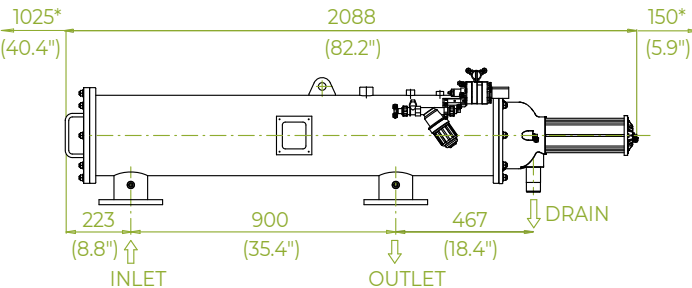

Head Loss Graph (in clean water)
Dim: mm (inch)

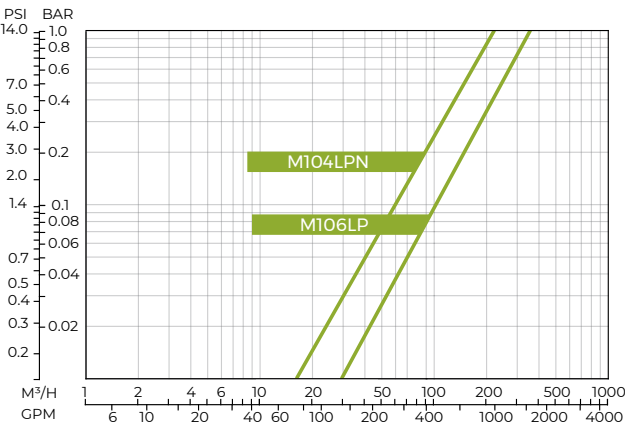

M104XLP / M106XLP / M108LP / M110P

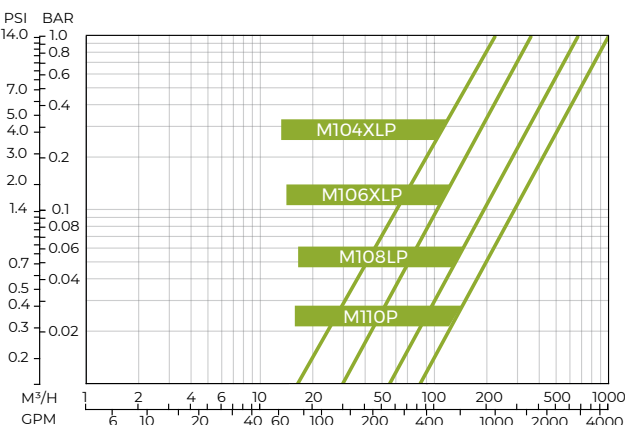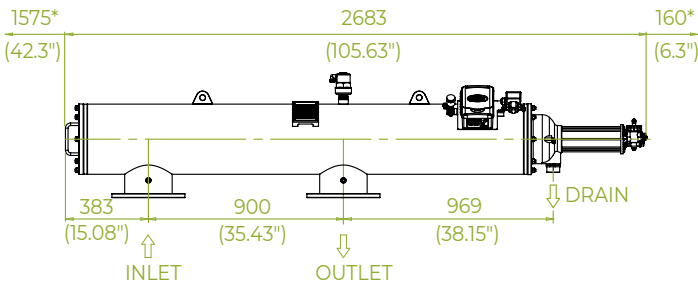

*Approx. length required for maintenance



Technical Specifications - M100 Models

Filter Model	M104LPN / M106LP	M104XLP / M106XLP / M108LP / M110P
General Data		
Maximum flow rate*	180 m³/h (793 gpm)	400 m³/h (1,760 gpm)
Inlet/Outlet diameter	4" 100 (mm) 6" 150 (mm)	4" (100 mm) 6" (150 mm) 8" (200 mm) 10" (250 mm)
Standard filtration degrees	500, 300, 200, 130, 100, 80 micron	
Minimum working pressure	2 bar (30 psi) For lower pressure please consult Amiad	
Maximum working pressure	10 bar (150 psi)	
Maximum working temperature	55°C (131°F)	
Weight [empty]	4" 90 kg (198 lb) 6" 115 kg (253.5 lb)	4" 110 kg (242.5 lb) 6" 120 kg (264.5 lb) 8" 140 kg (308.6 lb) 10" 158 kg (348 lb)

* Consult Amiad for optimum flow depending on filtration degree and water quality.

Flushing Data		
Minimum flow for flushing (at 2 bar - 30 psi)	26 m³/h (114 gpm)	30 m³/h (132 gpm)
Reject water volume per flush cycle (at 2 bar - 30 psi)	125 liter (33 gallon)	150 liter (40 gallon)
Flushing cycle time	15 seconds	
Exhaust valve	1.5" (40 mm)	
Flushing criteria	Differential pressure of 0.5 bar (7 psi), time intervals or manual operation	


Screen Data		
Total filtration area	6,150 cm² (953 in²)	8,890 cm² (1,378 in²)
Net filtration area	4,500 cm² (698 in²)	6,800 cm² (1,054 in²)
Screen types	Molded weavewire stainless steel 316L	

Construction Materials	
Filter housing	Epoxy-coated carbon steel 37-2 (stainless steel 316L on request)
Filter lid	High density polypropylene, epoxy coated carbon steel 37-2 (stainless steel 316L on request)
Cleaning mechanism	PVC and stainless steel 316L
Exhaust valve	Brass, stainless steel 316L, BUNA-N
Seals	BUNA-N
Control	Brass, stainless steel 316L, and acetal


MG Models

MG110


Typical Dimentional Drawing

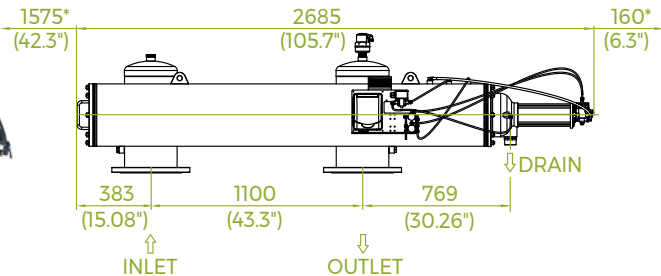

MG112

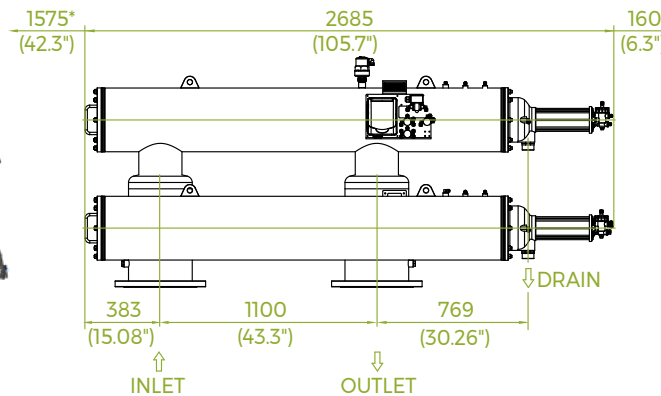


MG114

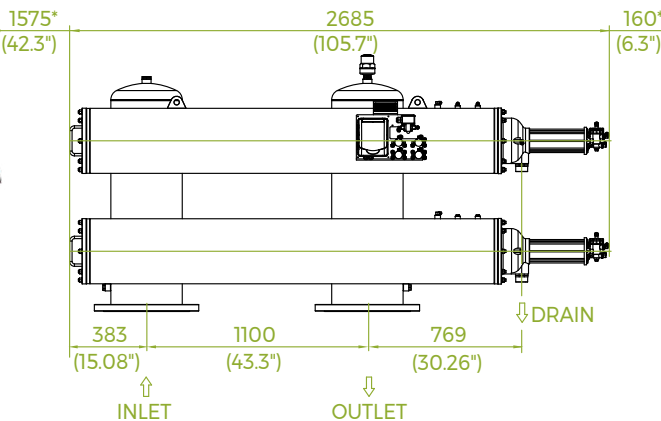

*Approx. length required for maintenance



Head Loss Graph (in clean water)

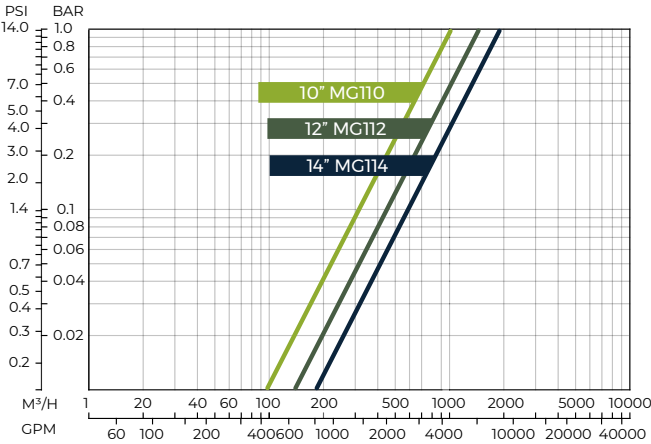

Technical Specifications - MG Models

Filter Model	MG110	MG112	MG114
General Data			
Maximum flow rate*	400 m³/h (1,760 gpm)	600 m³/h (2,640 gpm)	800 m³/h (3,520 gpm)
Inlet/Outlet diameter	10" (250 mm)	12" (300 mm)	14" (350 mm)
Standard filtration degrees	500, 300, 200, 130, 100, 80 micron		
Minimum working pressure	2 bar (30 psi) For lower pressure please consult Amiad		
Maximum working pressure	10 bar (150 psi)		
Maximum working temperature	55°C (131°F)		
Weight [empty]	325 kg (717 lb)	480 kg (1,054 lb)	723 kg (1,590 lb)
* Consult Amiad for optimum flow depending on filtration degree and water quality.			
Flushing Data			
Minimum flow for flushing (at 2 bar - 30 psi)	30 m³/h (132 gpm)		
Reject water volume per flush cycle (at 2 bar - 30 psi)	300 liter (80 gallon)	450 liter (120 gallon)	600 liter (160 gallon)
Flushing cycle time	30 seconds	45 seconds	60 seconds
Exhaust valve	1.5" (40mm)		
Flushing criteria	Differential pressure of 0.5 bar (7 psi), time intervals or manual operation		
Screen Data			
Total filtration area	17,780 cm² (2,756 in²)	26,670 cm² (4,134 in²)	35,560 cm² (5,512 in²)
Net filtration area	13,600 cm² (2,108 in²)	20,400 cm² (3,162 in²)	27,200 cm² (4,216 in²)
Screen types	Molded weavewire, stainless steel 316L		



Headquarters
Amiad Water Systems Ltd
Israel.

Global sales

www.irrigationglobal.com

orders@irrigationglobal.com



 **amiad**® IRRIGATION

MASTERS OF FILTRATION

www.amiad.com

910101-000956/09.2019

Copyright © 2019 Amiad Water Systems Ltd. All rights reserved. The contents of this catalogue including without limitation all information and materials, images, illustrations, designs, icons, photographs, graphical presentations, designs, literary works, data, drawings, slogans, phrases, names, trademarks, titles and any other such materials that appear in this catalogue (collectively, the "Contents") are the sole property of Amiad Water Systems Ltd. ("Amiad"). Amiad has sole and exclusive right, title and interest in the Contents, including any intellectual property rights, whether registered or not, and all know-how contained or embodied therein. You may not reproduce, publish, transmit, distribute, display, modify, create derivative works from, sell or participate in any sale of, or exploit in any way, in whole or in part, any of the Contents or the catalogue. Any use of the catalogue or the Contents, other than for personal use, requires the advanced written permission of Amiad.